



Architect/Engineering Specifications:




Vandal resistant 0.5 GPM non-aerated spray device with stainless steel body and 55/64-27 UN female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____

Model Specified _____ Quantity _____

Variations Specified _____

Date _____

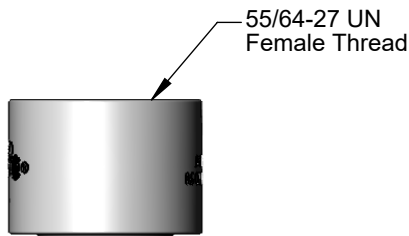

Features & Benefits:

- Vandal resistant 0.5 GPM non-aerated spray device w/ stainless steel body
- Includes VR key
- 55/64-27 UN female inlet, Series 6
- Material: Stainless steel body

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: 0.5 GPM [1.89 L/min] @ 60 psi [4.14 bar]

