



Architect/Engineering Specifications:



Flow control valve with adjustment screw, 1/2" NPSM female inlet with sealing washer and 1/2" NPSM male outlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____

Model Specified _____ Quantity _____

Variations Specified _____

Date _____

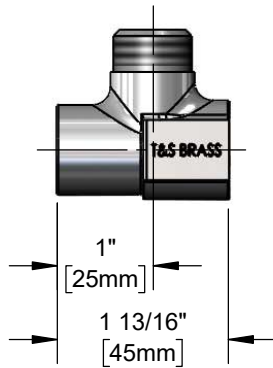

Features & Benefits:

- Flow control valve with adjustment screw
- 1/2" NPSM female inlet with sealing washer
- 1/2" NPSM male inlet
- Material: Chrome plated brass body

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate: 3.3 GPM [12.5 l/min] @ 60 psi [4.14 bar]

