



Pre-Rinse Spray Valves
B-0107-QD



TAG:

Pre-Rinse Spray Valve

Architect/Engineering Specifications:

1.15 GPM spray valve with quick disconnect, grey grip handle, hose washer, hold-down ring and 3/8" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61- Section 9 and NSF 372. 2019 DOE PRSV - Class II Compliant.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

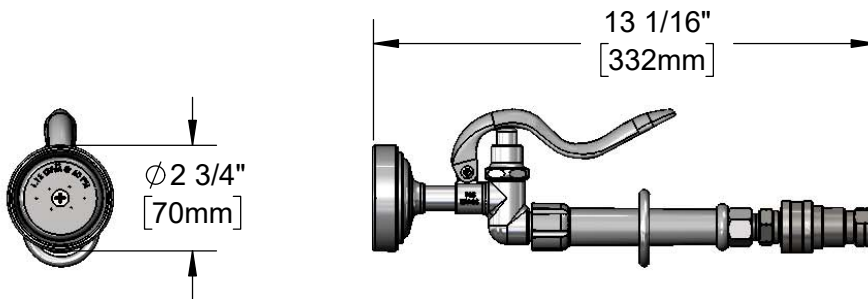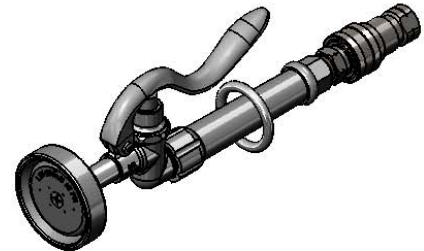

Features & Benefits:

- Pre-rinse spray valve with quick disconnect
- Heat resistant grey grip handle
- Hose washer and hold down ring
- 3/8" NPT female inlet
- Connect directly to T&S hose reels
- Material: Chrome plated brass spray valve and stainless steel quick disconnect

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 1.15 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 10/15/18