

# **Architect/Engineering Specifications:**

Deck mount single lever faucet with deck plate, polished chrome plated brass body with integral spout, polished chrome plated brass deck plate, 2.2 GPM aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle and 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.





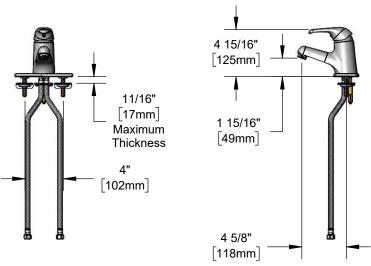


TAG:

### Features & Benefits:

- Deck mount single lever faucet w/ polished chrome plated brass body w/ integral spout
- 6" polished chrome plated brass deck plate (fits 4" hole centers)
- 2.2 GPM aerator, Series 4 (B-0199-04)
- Single lever handle w/ color coded index
- · Ceramic cartridge w/ adjustable temperature limit stop
- 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections
- · Deck Plate Gasket and Mounting Hardware
- Material: Polished chrome plated brass body & deck plate, chrome plated metal handle and stainless steel hoses

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



· Ceramic Cartridge: Two Year (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 2.2 GPM @ 60 psi







## Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05
1.0	N/A	N/A	N/A	□ B-0199-09-LF10
1.2	□ B-0199-04-F12	N/A	□ B-0199-09-F12	N/A
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF15
2.2	Standard	□ B-0199-25	□ B-0199-09	□ B-0199-27







T&S BRASS AND BRONZE WORKS, INC.

