
TAC.	
TAG:	

4" Centerset Single Lever Faucet

Architect/Engineering Specifications:

4" centerset, deck mount lavatory single lever faucet, polished chrome brass body with integral spout, 2.2 GPM aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle with anti-microbial coating and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name		
Model Specified	Quantity	
Variations Specified		
Date		

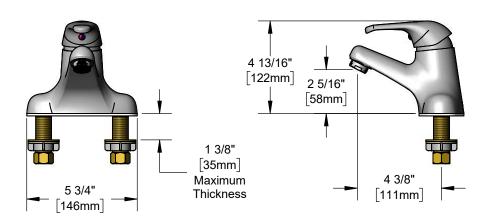




Features & Benefits:

- 4" centerset, deck mount lavatory single lever faucet
- Polished chrome brass body with integral spout
- 2.2 GPM aerator, Series 4 (B-0199-04)
- Single lever handle with anti-microbial coating & color coded index
- Ceramic cartridges with adjustable temperature limit stop
- 1/2" NPSM male inlets with coupling nuts
- Mounting hardware and deck gasket
- Material: Polished chrome brass body & anti-microbial coated chrome plated metal handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Ceramic Cartridge: Two Year (Limited)

Performance Data:



- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40 °F 140 °F [4.44 °C 60 °C]
- Flow Rate: 2.2 GPM [8.33 L/min] @ 60 psi [4.14 bar]

Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05
1.0	N/A	N/A	N/A	□ B-0199-09-LF-10
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF-15
2.2	Standard	□ B-0199-25	□ B-0199-09	□ B-0199-27







T&S BRASS AND BRONZE WORKS, INC.



