

Electronic faucets


Electronic Sensor Faucet

TAG:

5EF-2D-DS-TMV

Architect/Engineering Specifications:

4" deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 2.2 GPM vandal resistant aerator, AC/DC control module, thermostatic temperature control mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 37, ASSE 1070 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements

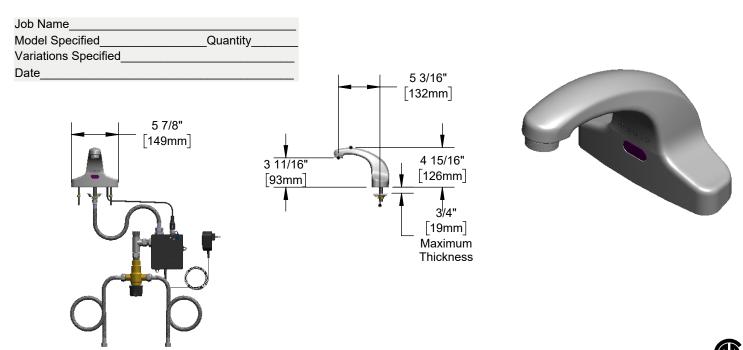



Features & Benefits:

- 4" deck mount faucet w/ polished chrome plated brass body with integral spout
- 2.2 GPM vandal resistant aerator, Series 9 (B-0199-09)
- Water resistant control module
- Plug in AC transformer or (4) AA battery (DC) power options
- Thermostatic temperature control mixing valve w/ check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body

Product Compliance:








- ANSI A117.1 (ADA)
- UL 1951
- ASSE 1070 (TMV)



Warranty: One Year (Limited)



Performance Data:



Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar]

Water Consumption: @ 10 sec = .37 gal [1.40 L]

bampuon. @	10 000	.or gai	[1.10 =
@	15 sec =	.55 gal	[2.08 L]

Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05
1.0	N/A	N/A	N/A	□ B-0199-09-LF10
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF15
22	□ R-0199-04	□ B-0199-25	Standard	□ B-0199-27








equip Foodservice Accessories





Date: 12/29/23

