



Architect/Engineering Specifications:


20" flexible stainless steel hose with 3/8" NPT male inlets and 3/8" NPT quick disconnect. Certified to NSF 61-Section 9 and NSF 372.

Job Name \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Variations Specified \_\_\_\_\_

Date \_\_\_\_\_

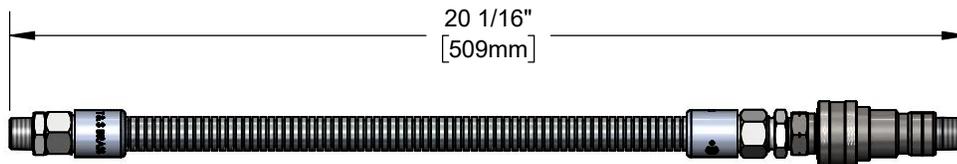

Features & Benefits:

- 20" flexible stainless steel hose
- 3/8" NPT male inlets
- Polyurethane inner tubing
- 3/8" NPT quick disconnect
- Hose washers included
- Material: Polished chrome plated brass fittings, Stainless steel hose

Product Compliance:

- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)

Performance Data:

- N/A

