


Pot and Kettle Filler

Architect/Engineering Specifications:

Wall mount pot and kettle filler, chrome plated brass body with single control, atmospheric vacuum breaker, 68" flexible stainless steel hose, spray valve with hook nozzle, ceramic cartridge with check valve, 4-arm handle and 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and ASSE 1001.

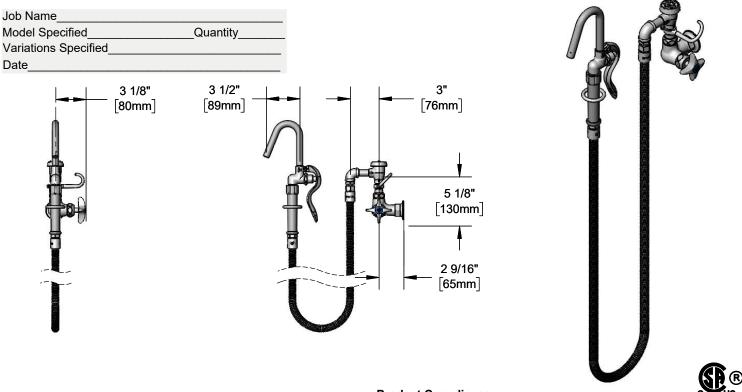

Features & Benefits:

- Wall mount, single control pot filler
- Atmospheric vacuum breaker
- 68" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- Spray valve with hook nozzle
- Quarter-turn Cerama cartridge w/ check valve
- 4-Arm handle w/ blue index
- 1/2" NPT female inlet with Ø2" wall flange
- Material: Polished chrome plated brass, body & spray valve, stainless steel hose and chrome plated metal handles & vacuum breaker

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- **ASSE 1001**
- 2019 DOE PRSV Non-Compliant

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40 °F 140 °F [4.44 °C 60 °C]
- Flow Rate: 3.14 GPM [11.89 L/min] @ 60 psi [4.14 bar]

Optional Handles

Optional Cartridges With Checks

- □ 4" Wrist Action
- □ Lever
- □ 4-Arm (Standard)
- □ Quarter-Turn Cerama w/ Check Valve (Standard)
- □ Quarter-Turn Eterna w/ Spring Check







T&S BRASS AND BRONZE WORKS, INC.



