Pot and Kettle Fillers

B-0610-36H


TAG:

Pot and Kettle Filler

Architect/Engineering Specifications:

8" wall mount mixing faucet with chrome plated brass body, atmospheric vacuum breaker, 36" flexible stainless steel hose, spray valve with hook nozzle, compression cartridges with spring checks, lever handles and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and ASSE 1001.

Job Name		
Model Specified	Quantity	
Variations Specified		
Date		

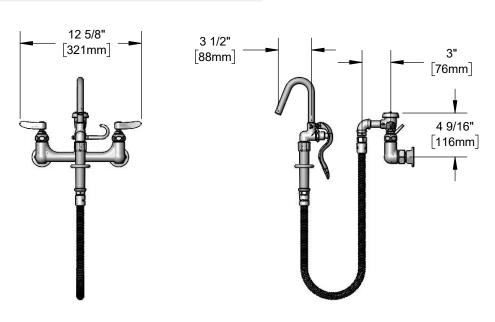





Features & Benefits:

- 8" wall mount mixing faucet with chrome plated brass body
- Atmospheric vacuum breaker
- 36" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- Spray valve with hook nozzle
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets w/ Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- Material: Polished chrome plated brass body & spray valve, chrome plated metal handles & vacuum breaker and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ASSE 1001 (VB)
- 2019 DOE PRSV Non-Compliant

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40 °F 140 °F [4.44 °C 60 °C]
- Flow Rate: 3.68 GPM [13.93 L/min] @ 60 psi [4.14 bar]

Optional Handles

☐ 4" Wrist Action

□ Lever (Standard)

□ 4-Arm

□ Quarter-Turn Cerama w/ Check Valve

Optional Cartridges With Checks

□ Quarter-Turn Eterna w/ Spring Check (Standard)









T&S BRASS AND BRONZE WORKS, INC.







Date: 03/03/20