


Medical and Lavatory Faucets B-0831-F05

Slow Self-Closing Metering Faucet

Architect/Engineering Specifications:

4" deck mount mixing faucet with polished chrome plated brass body and integral spout, 0.5 GPM non-aerated spray device, metering cartridges, push button caps and 1/2" NPSM male inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

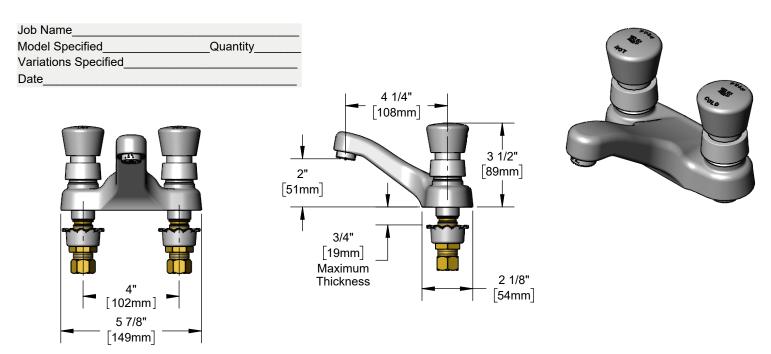

Features & Benefits:

- 4" deck mount mixing faucet w/ polished chrome plated brass body and integral spout
- 0.5 GPM non-aerater spray device, Series 3 (B-0199-03-N05)
- Metering cartridge
- Adjustable metering cycle, 10 to 30 seconds
- Push button (hot & cold) caps w/ vandal resistant screws
- 1/2" NPSM male inlets
- Material: Polished chrome plated brass body & spout and chrome plated metal caps

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

ADA Compliant

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 0.5 GPM [1.9 L/min] @ 60 psi [4.14 bar]
- Water Consumption: @10 sec = .08 gal [.32 L] @15 sec = .13 gal [.47 L]

Optional Outlets (Series 3 / VR Series 8)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Cartridges
0.35	N/A	□ B-0199-03-N035	N/A	□ B-0199-08-N035	□ Push Button Metering (Standard)
0.5	N/A	Standard	N/A	□ B-0199-08-N05	□ Pivot Action Metering
1.0	N/A	N/A	N/A	□ B-0199-08-LF10	□ Wrist Action Metering
1.5	□ B-0199-03-WS	N/A	□ B-0199-08-WS	□ B-0199-08-LF15	
2.2	□ B-0199-03	□ B-0199-26	□ B-0199-08	□ B-0199-28	







T&S BRASS AND BRONZE WORKS, INC.



