

SAFETLINK Water Appliance Connector

Architect/Engineering Specifications:

36" coated water connector hose (blue) with 1/2" NPT male outlet and 1/2" NPT female reverse quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9, NSF 372 and NSF 2.

Job Name Model Specified Quantity Variations Specified_ Date

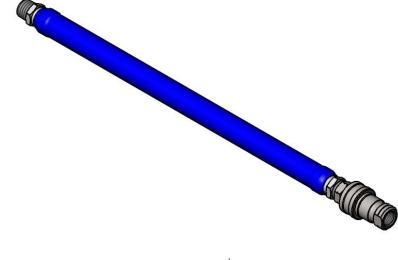







Features & Benefits:

- 36" coated water connector hose (blue)
- 1/2" NPT male welded fitting ends
- 1/2" NPT female reverse quick disconnect
- Extruded coating
- Stainless steel braided hose
- Material: Extruded coated stainless steel braids

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- NSF 2

Warranty: Five Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 175 °F Flow Rate: 20.24 GPM @ 60 psi









