


Medical and Lavatory Faucets B-0892-CR7XPF15

Centerset Lavatory Faucet

Architect/Engineering Specifications:

4" deck mount mixing faucet with polished chrome plated brass body, 5 11/16" swivel/rigid gooseneck with plain end outlet, 1.5 GPM flow control in swivel piece, ceramic cartridges with check valves, 4" wrist action handles and 1/2" NPSM male inlets with compression nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

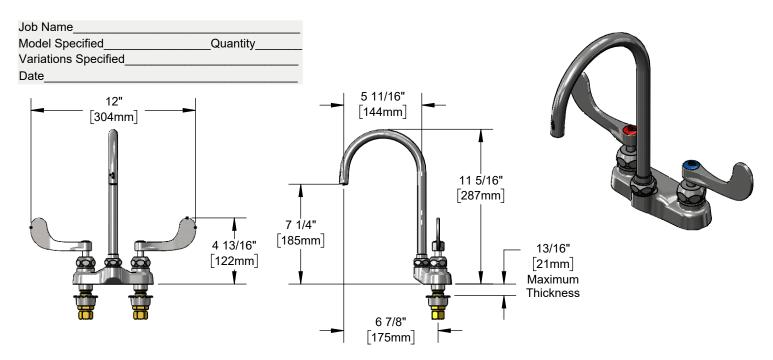

Features & Benefits:

- 4" deck mount mixing faucet w/ polished chrome plated brass body
- 5 11/16" swivel gooseneck w/ plain end outlet
- Lock washer included for rigid applications
- 1.5 GPM flow control in swivel piece
- Quarter-turn Cerama cartridges with check valves to prevent crossflow of water
- 4" wrist action handles with color coded indexes
- 1/2" NPSM male inlets with coupling nuts
- Material: Polished chrome plated brass body and tubular spout, chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- EPA WaterSense

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)



Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 1.5 GPM [5.7 L/min] @ 60 psi [4.14 bar]



Optional Flow Disc

GPM	Model No	Optional Handles	Optional Cartridges
0.5	□ FD05	□ 4" Wrist Action (Standard)	□ Quarter-Turn Cerama w/ Check Valve (Standard)
1.0	□ FD10	□ 4-Arm	□ Quarter-Turn Eterna w/ Spring Check
1.2	□ FD12	□ Lever	□ Metering
1.5	Standard		ŭ
2.2	□ FD22		







T&S BRASS AND BRONZE WORKS, INC.

