

Electronic Faucet


5EF-1D-DS-TMV

TAG:

Electronic Sensor Faucet

Architect/Engineering Specifications:

Single hole deck mount electronic sensor faucet with polished chrome plated brass body, 2.2 GPM vandal resistant aerator, AC/DC control module, theromstatic temperature mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372, UL 1951 and ASSE 1070. Meets ADA ANSI/ICC A117.1 requirements

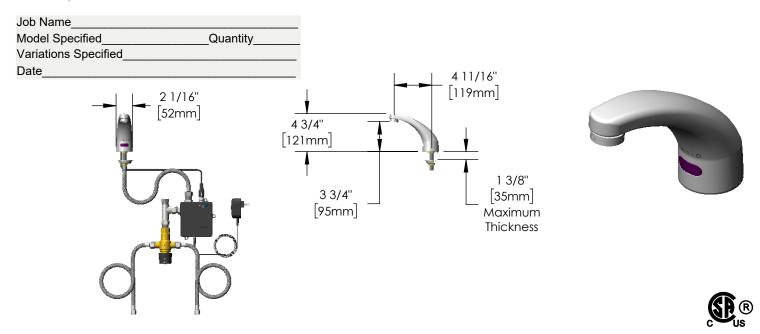

Features & Benefits:

- Single hole deck mount faucet w/ polished chrome plated brass body
- 2.2 GPM vandal resistant aerator, Series 9 (B-0199-09)
- Water resistant control module
- Plug in AC transformer or (4) AA battery (DC) power options
- Thermostatic temperature mixing valve w/ check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Low battery LED indicator light
- · Material: Polished chrome plated brass body & cast spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951
- ASSE 1070 (TMV)

Warranty: One Year (Limited)

ADA Compliant



Performance Data:

• Pressure: 20 - 125 psi

Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar] Water Consumption: @ 10 sec = .37 gal [1.40 L]

@ 15 sec = .55 gal [2.08 L]

Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035	Optional Deck Plates
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05	□ 4" Chrome Plated Brass Deck Plate
1.0	N/A	N/A	N/A	□ B-0199-09-LF10	□ 8" Chrome Plated Brass Deck Plate
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF15	
2.2	□ B-0199-04	□ B-0199-25	Standard	□ B-0199-27	









