
# TAG:


# Single Lever Faucet

## **Architect/Engineering Specifications:**

Deck mount single lever faucet with polished chrome plated brass body, 9" swivel spout, polished chrome plated deck plate cover, 2.2 GPM aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle, 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections and side spray with 7 ft. hose and hose guide. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements

Job Name Model Specified Quantity Variations Specified Date



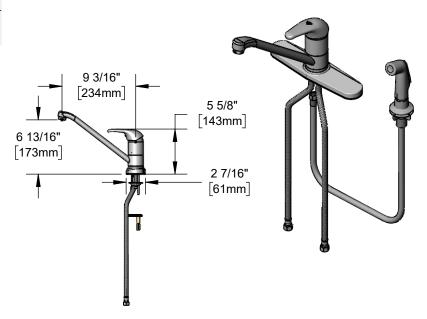

#### Features & Benefits:

- Deck mount single lever faucet with polished chrome plated brass body
- Polished chrome plated brass 10" deck plate (fits 8" hole centers)
- 9" swivel spout
- 2.2 GPM aerator, Series 4 (B-0199-04)
- Ceramic cartridge w/ adjustable temperature limit stop
- Single lever handle w/ color coded index
- 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections
- Side spray with 7 ft. hose and hose guide
- Material: Polished chrome plated brass body & deck plate, chrome plated thermoplastic sidespray, chrome plated metal handle and stainless steel hoses

# Optional Outlets (Series 4 / VR Series 9)

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Ceramic Cartridge: Two Year (Limited)

#### **Performance Data:**

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 2.2 GPM [8.3 L/min]@ 60 psi [4.14 bar] Sidespray: 2.2 GPM [8.3 L/min]@ 60 psi [4.14 bar]





		Non-Aerated		VR Non-Aerated	Accessories	
GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	☐ Cover Plate w/ Side Spray Hole	
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035	□ 4' Side Spray	
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05	□ 6" Handle	
1.0	N/A	N/A	N/A	□ B-0199-09-LF10		
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF15		
2.2	Standrad	□ B-0199-25	□ B-0199-09	□ B-0199-27		









