




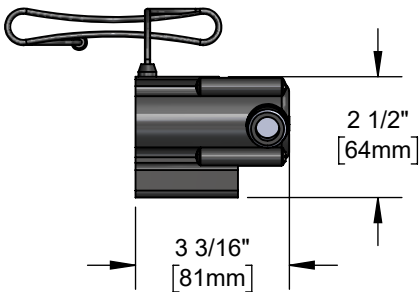

Architect/Engineering Specifications:

Hydro-generator power supply accessory package for ChekPoint electronic sensor faucet models with 1/2" NPSM male inlet and outlet. Minimum flow rate of 1.0 GPM required in applications using EC-HYDROGEN. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____



Features & Benefits:

- Hydro-generator power supply accessory
- 1/2" NPSM swivel coupling included
- No AA batteries or AC adapter needed to supply power to faucet
- 1/2" NPSM inlet and outlet
- Minimum flow rate is required in applications using EC-HYDROGEN
- 71" power cord w/ male plug to connect to control module

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: Three Year (Limited)



Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Minimum Flow Rate: 1.0 GPM [3.79 L/min] @ 60 psi [4.14 bar]

