
Easy Install Pre-Rinse Unit

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, 18" riser, 44" flexible stainless steel hose with heat resistant handle, 1.07 GPM spray valve, ceramic cartridges with check valves, lever handles, 1/2" male elbow installation kit, 6" wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name Model Specified Quantity Variations Specified Date



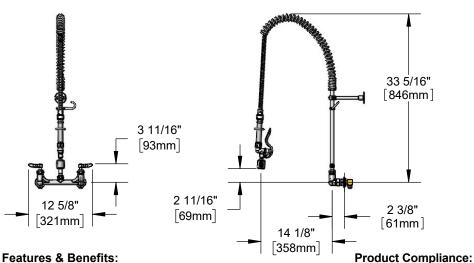

Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall 18" riser for quick installation
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1.07 GPM spray valve
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 6" wall bracket
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- 1/2" male elbow installation kit
- Adjustable centers from 7 3/4" to 8 1/4"
- Material: Polished chrome plated brass body, riser & spray valve body, stainless steel hose, and chrome plated metal handles

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Class II

Warranty: Three Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F

Flow Rate: 1.07 GPM @ 60 psi





Optional Handles

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve (Standard)
- □ Quarter-Turn Eterna w/ Spring Check

Optional Pre-Rinse Spray Valves

- □ B-0107 (1.15 GPM)
- □ B-0107-C (0.65 GPM)
- ☐ B-0107-J (1.07 GPM) (Standard)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)









