

Epoxy Coated Retractable Hose Reel

B-7232-01-ESB


Open Epoxy Coated Hose Reel

TAG:

Architect/Engineering Specifications:


Open epoxy coated steel hose reel, high flow spray valve with swivel, 3/8" x 35' heavy-duty non-marking hose, ratcheting system, multi-fit bracket, adjustable hose bumper, 3/8" NPT female inlet and universal stainless steel wall mount swing bracket with reel-to-bracket mounting hardware.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	



Features & Benefits:

- · Open epoxy coated steel hose reel
- · Blue high flow spray valve w/ swivel
- 3/8" x 35' heavy-duty non-marking hose rated to 300 PSI
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/8" NPT female inlet
- · Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- 100 degree universal stainless steel wall mount swing bracket designed for one person installation with reel-to-bracket mounting hardware
- Material: Epoxy coated steel open reel and wall bracket, polished chrome plated spray valve, stainless steel swing bracket

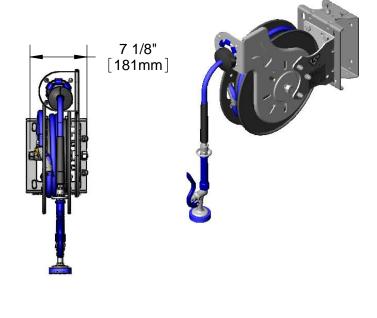

Product Compliance:

- NSF 61 Exempt (Non-Potable)
- EPAct 2005 Non-Compliant (PRSV)

Warranty: Two Year (Limited)Hose: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
 Temperature: 40 °F - 140 °F
 Flow Rate: 3.89 GPM @ 60 psi

Optional Hose Reel Spray Valves

□ B-0107
□ B-0108
□ B-0108-H
□ EB-0107
□ EB-0107
□ EB-322
□ MV-2516-24
□ MV-2522-24
□ MV-3516-24
□ MV-3516-

Optional Hose Reel Multi-Fit Brackets

3/8" x 15', 30', & 35' Epoxy Coated Hose Reel

☐ G019430-45 EasyInstall Stainless Steel Swing Bracket (Standard)

☐ G016636-45 Epoxy Coated Wall Swing Bracket

☐ G016652-45 Deck Mount Pivot Bracket

□ G018477-45 Stainless Steel Table Leg Swing Bracket







T&S BRASS AND BRONZE WORKS, INC.

