
Swivel Sink and Pantry Faucets B-0220-166X-CRK

Double Pantry Faucet

Architect/Engineering Specifications:

8" deck mount mixing faucet with polished chrome plated brass body, 9" swing nozzle with stream regulator outlet, ceramic cartridges with check valves, lever handles and 1/2" NPT male supply nipples. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

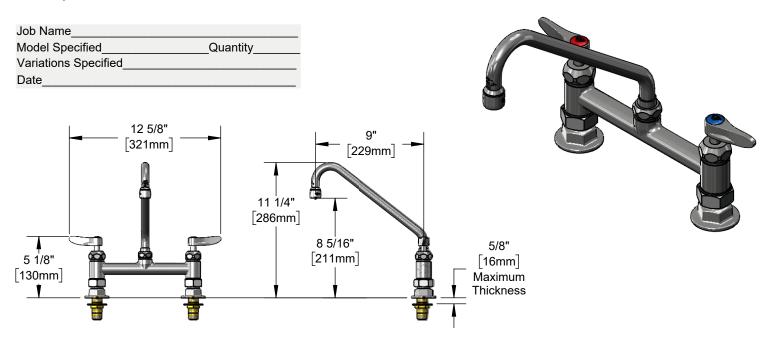

Features & Benefits:

- 8" deck mount mixing faucet with polished chrome plated brass body
- 9" swing nozzle
- Lock washer provided for rigid application
- Stream regulator outlet, Series 1
- Quarter-turn Cerama cartridges w/ check valves to prevent cross flow of water
- Lever handle w/ color coded indexes
- 1/2" NPT female eccentric inlets w/ Ø 2" flanges
- 1/2" NPT male supply nipples included
- Adjustable centers from 7 3/4" to 8 1/4"
- Material: Polished chrome plated brass body & tubular spout and polished chrome plated metal handles

Non Agratad

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar] Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: 10.45 GPM [39.6 L/min] @ 60 psi [4.14 bar]

Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	Optional Handles
0.35 0.5 1.0 1.2 1.5 2.2	N/A N/A B-0199-01-F10 B-0199-01-F12 B-0199-01-WS B-0199-01	2 □ B-0199-01-LF12	N/A □ B-0199-06-F10 □ B-0199-06-F12 □ B-0199-06-WS	□ B-0199-06-LF12	 □ 4" Wrist Action □ Lever (Standard) □ 4-Arm Optional Cartridges With Checks □ Quarter-Turn Cerama w/ Check Valve (Standard) □ Quarter-Turn Eterna w/ Spring Check

VP Non Agrated







T&S BRASS AND BRONZE WORKS, INC.



