Swivel Sink and Pantry Faucets


B-0243

Double Pantry Faucet

TAG:

Architect/Engineering Specifications:

Wall mount mixing faucet with polished chrome plated brass body, 6" cast spout with 2.2 GPM aerator, compression cartridges with spring checks, lever handles and 1/2" NPT female adjustable arm inlets w/ integral service stops. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

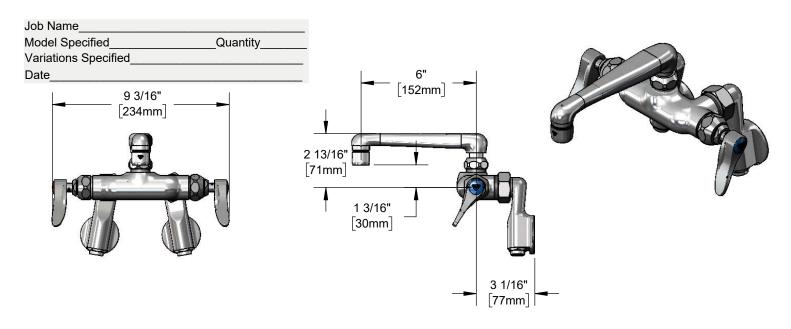

Features & Benefits:

- Adjustable inlet wall mount mixing faucet with polished chrome plated brass body
- 6" cast spout
- Lock washer included for rigid applications
- 2.2 GPM aerator, Series 2 (B-0199-02)
- Quarter-turn Eterna compression cartridges with spring checks to prevent crossflow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female adjustable arm inlets w/ Ø2" flanges
- Integral Service Stops
- Adjustable centers from 2 1/4" to 8 1/4" above or below centerline
- Material: Polished chrome plated brass body, chrome plated cast brass spout and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)



Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F

Flow Rate: 2.2 GPM @ 60 psi



Optional Outlets (Series 2 / VR Series 7)

		Non-Aerated		VR Non-Aerated	Optional Cartridges With Checks
GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	□ Quarter-Turn Cerama w/ Check Valve
0.35	N/A	□ B-0199-02-N035	N/A	□ B-0199-07-N035	□ Quarter-Turn Eterna w/ Spring Check (Standard)
0.5	N/A	□ B-0199-02-N05	N/A	□ B-0199-07-N05	
1.0	□ B-0199-02-F10	N/A	□ B-0199-07-F10	N/A	Optional Handles
1.2	□ B-0199-02-F12	N/A	□ B-0199-07-F12	N/A	□ 4" Wrist Action
1.5	□ B-0199-02-WS	N/A	□ B-0199-07-WS	N/A	□ Lever (Standard)
2.2	Standard	N/A	□ B-0199-07	N/A	□ 4-Arm
					□ 4- AIIII







T&S BRASS AND BRONZE WORKS, INC.

