

Swivel Sink and Pantry Faucets


TAG:

Deck Mount Faucet

5F-2SLX18

Architect/Engineering Specifications:

Single hole deck mount mixing faucet with polished chrome plated brass body, 18 1/8" swing nozzle with full flow laminar flow device, quarter-turn ceramic cartridges, lever handles, 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" O.D. compression connections. Certified to ASME A112.18.1\CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI\ICC A117.1 requirements.

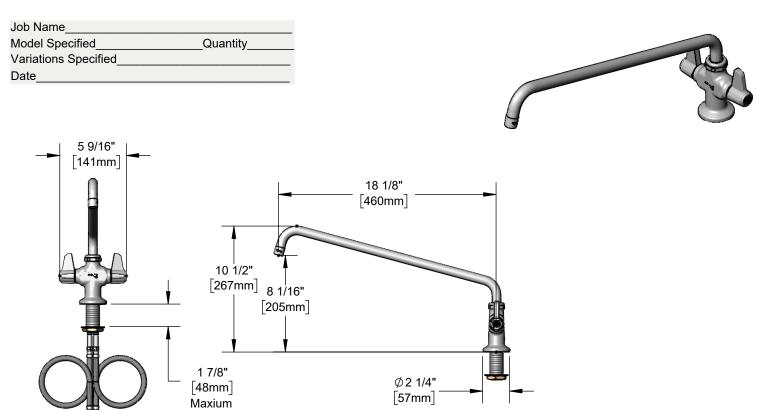

Features & Benefits:

 Single hole deck mount mixing faucet w/ polished chrome plated brass body

Thickness

- 18 1/8" swing nozzle w/ full flow laminar flow device
- · Quarter-turn ceramic cartridges
- equip lever handles
- 18" flexible stainless steel supply hoses w/
 1/2" NPSM / 5/8" O.D. compression connections
- Material: Polished chrome plated brass body and chrome plated metal handles

Product Compliance:



- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)



ADA Compliant

Performance Data:



• Temperature: 40°F - 140°F [4.44°C - 60°C]

• Flow Rate: 4.65 GPM [17.60 L/min] @ 60 psi [4.14 bar]







