

Service Sink/Mop Sink Faucets B-2345-01


| TAG: | |
|------|--|
| | |


Service Sink Faucet

Architect/Engineering Specifications:

Adjustable wall mount mixing faucet with polished chrome plated brass body, polished chrome plated brass spout with garden hose male outlet, compression cartridges with spring checks, lever handles and 1/2" NPT female adjustable arm inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61 Section-9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

| Job Name | |
|-----------------------|----------|
| Model Specified | Quantity |
| Variations Specified_ | |
| Date | |



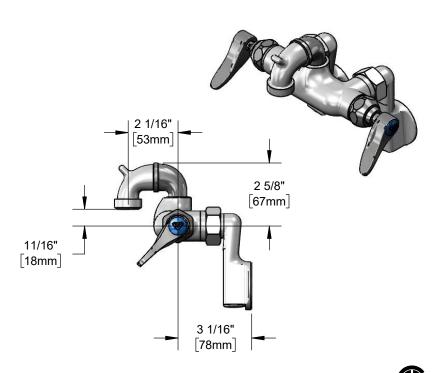

Features & Benefits:

- Wall mount mixing faucet with polished chrome plated brass body
- Garden hose male outlet
- Lever handles with color coded indexes
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- 1/2" NPT female adjustable arm inlets with \emptyset 2" flanges
- Adjustable centers from 2 1/4" to 8 1/4" above or below centerline
- Material: Polished chrome plated brass body & spout and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

ADA Compliant

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F

Flow Rate: 16.30 GPM @ 60 psi

Optional Handles

- □ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)







